



www.avax.com


Avax International
 PO Box 542
 Hillsburgh, ON N0B 1Z0
 Canada

Tel: +1-647-367-1039
 Fax: +1-647-438-2242

PERTEC to SCSI Adapter



The **Pertec2SCSI** printed circuit card allows a Legacy Host with a Pertec style interface to attach to a modern SCSI tape drive. The SCSI tape drive will be seen as a single unit drive + formatter by the Host Computer's Pertec adapter.

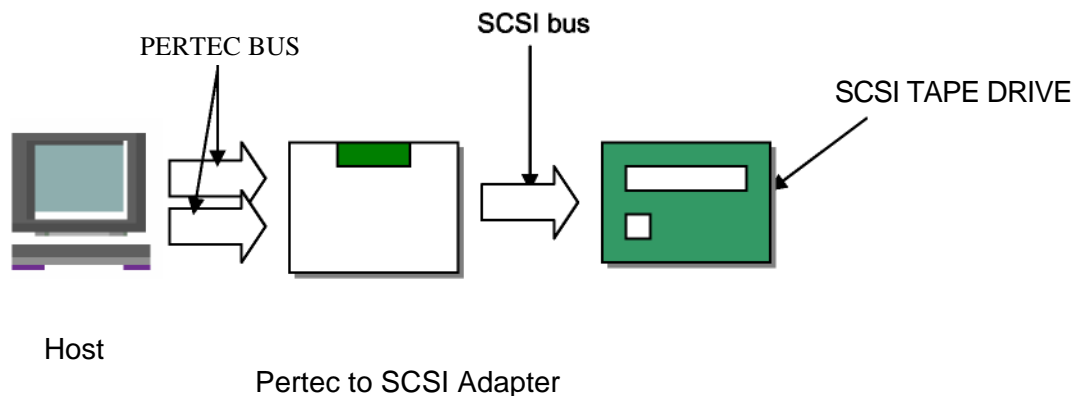

- Small format PCB converts connected SCSI Tape drive to appear as a Pertec device.
- Supports DAT, DLT, SDLT, 8mm, QIC/SLR and LTO SCSI drives.
- The SCSI interface is LVD/SE, but converters to HVD are available.
- Board is low power, using 5V only, and has an LCD display and pushbutton user interface.

Specifications

Board size: 115mm x 120mm. + floating Pertec cable assembly.

SCSI: SE/LVD internally terminated. 68-way SCSI III connector

Pertec: 2 50 pin male IDC sockets- each 2 rows of 25 pins.

Power: 5 Volts only @ 1.2 Watt

Power connector: Mini Floppy type

LCD Display: 2X16 backlit display with push button (mounted externally) for SCSI set-up, real time activity display and real-time diagnostics.

RS232 Serial Port for microcode load and real time diagnostics.

Contact: sales@avax.com